

Fig.1 Gate-Charge Characteristics

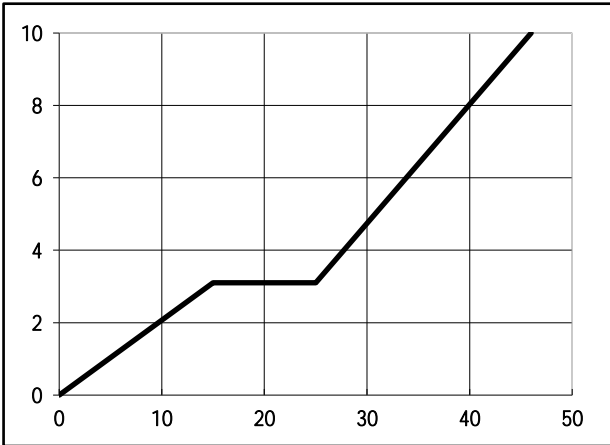


Fig.2 Capacitance Characteristics

Fig.3 Power Dissipation

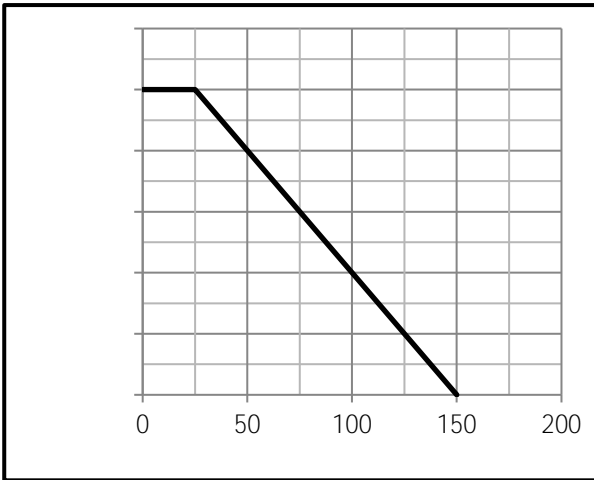


Fig.4 Typical output Characteristics

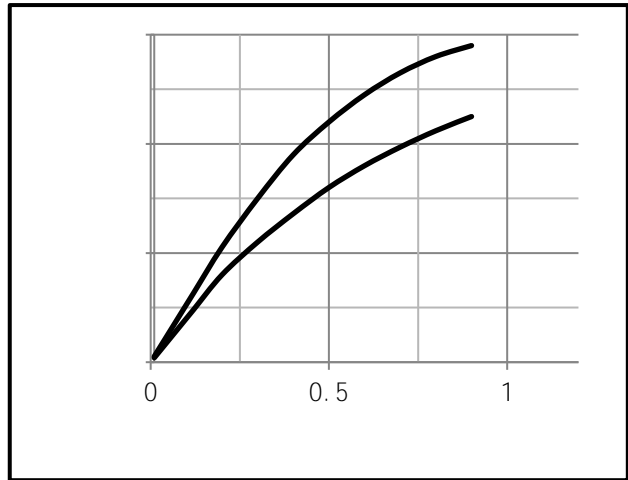


Fig.5 Threshold Voltage V.S Junction Temperature


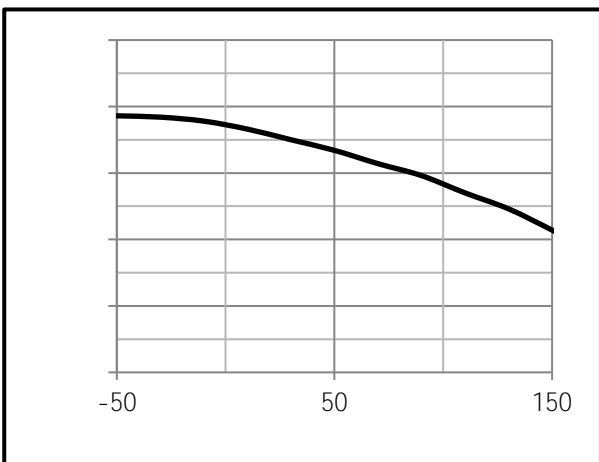



Fig.6 Resistance V.S Drain Current



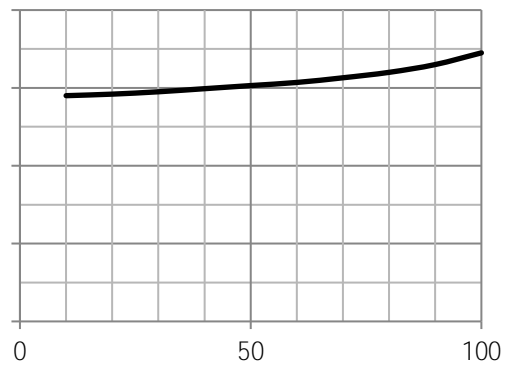

sions DFN5x6

Unit mm

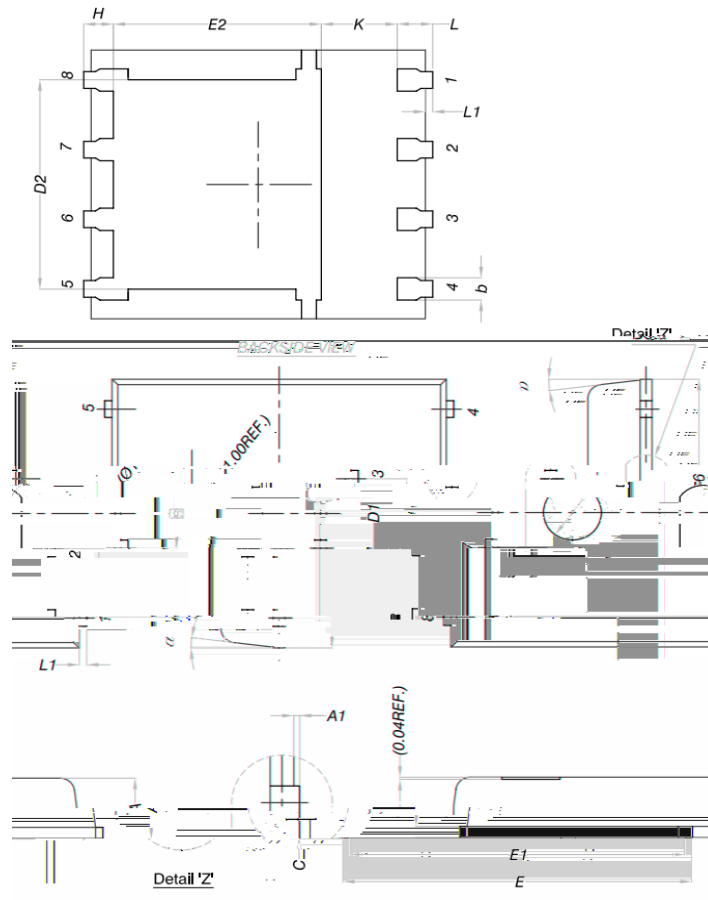

DIM.	MILLIMETERS		
	MIN.	NOM.	MAX.
A	0.90	1.00	1.10
A1	0	-	0.05
b	0.33	0.41	0.51
C	0.20	0.25	0.30
D1	4.80	4.90	5.00
D2	3.61	3.81	3.96

1	5.70	5.75	5.80
E2	3.38	3.58	3.78
1.27 BSC			
H	0.45	0.51	0.61
K	-	1.10	-
L1	0.51	0.51	0.51
3	0.20	-	0.06
6	-	-	0.1